


Pump Mounting Kit Instructions

These instructions apply to the Pump Mounting Kit only. See separate Pump Installation instructions for proper mounting orientation, electrical requirements, etc. Read these instructions completely before proceeding.

Step 1) Select a Mounting Bracket orientation. Review the diagrams below and select the bracket orientation most suitable to your application.

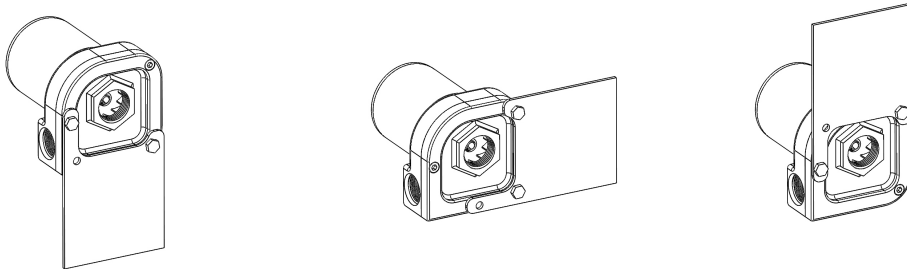

Keep in mind your orientation may be vertical instead of the horizontal orientation shown above.

Step 2) Attach the Mounting Bracket to the vehicle. The bracket can be formed as required to fit your vehicle, but be careful to keep the area near the pump as flat as possible. Once you have selected a mounting location and orientation, the bracket can be welded or bolted to the vehicle.

Step 3) Hold the pump in position on the bracket and note where the mounting holes line up with the two existing Cover screws. Remove **ONLY** those two Allen screws, leaving one screw undisturbed. Place the pump against the Mounting Bracket and install the two Hex Head screws (supplied with the Mounting Kit) through the bracket and into the pump where the Allen screws were removed. Tighten the Hex Head screws to approximately 12 Lb-Ft.